



Perfo[®]

Row Post Set


[Retour vers le site](#)

Product Description


Row post with patented hanging system by stainless pins and hooks
Galvanized coating
Customised fixing spacing
Additional drilling available by request

Benefits : PERFO[®], the most innovative **PATENTED**

Installation scheme for trellising wires flexible and easy to use :

- for lifting wires, stainless steel hooks can be used as traditional hooks guaranteeing resistance and easiness without crushing inside the post.
- fixed wires are locked and/or unlocked using stainless steel pins. No tools required to installation.

A unique set of fasteners without sharp edges : good for all types of wires (steel, nylon, PET "Polyethylene terephthalate") can all be used without fear of damage. Safe for users thanks to this "smooth" post limiting any risk of getting caught. Suitable for all types of mechanical work.

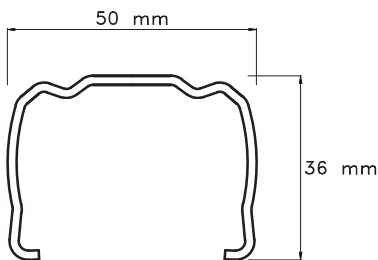

productivity

Density




Yield




Planting Height



Pins



Hooks



Create your own product

Length	Min. 1.20m to Max. 2.80m
Material	S250GD or S250GD XCarb™ (low carbon steel)
Coating	Z275 (NF EN 10142) or ZAM (Zinc, Aluminium, Magnesium)
Thickness	1,5 mm, 1,8 mm or 2 mm
Fixing Types	Stainless steel hooks and pins to be inserted in the side perforations
Drilling positioning	Only face to face
Packaging	300 pieces per batch

Why choose SLPA[®] posts ?



Customization



Resistance



Weight



Life time



Productivity



Eco-Friendly



100% recyclable





Perfo[®]


Row Post Set

Accessories



Gripper

Makes it easier to install hooks.

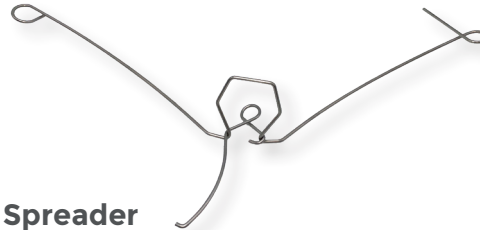

Spreader

Adapted to the post. The spreader allows you to keep the moving wires in a lower position when the vines are dormant. Save time during lifting.



Post cap

Adapted to the post. It protects the top of the post when pressing in.

Recommendations for use

When installing posts with a post driver, make sure to use the appropriate post cap. In order to guarantee optimal support, the recommended installation depth is 1/3 length of the post. For securing fixed wires, knock the hooks down with a hammer. Recommended maximum interspacing : 5 m. For high acidity soils, ZAM coating is recommended.

Notes

