





# P2 and P2B

## End Post



### End posts with 100mm spacing drilling system

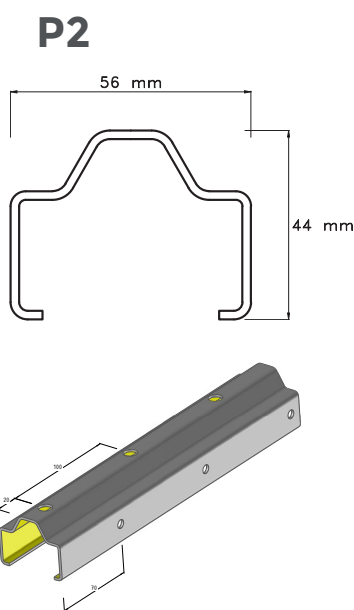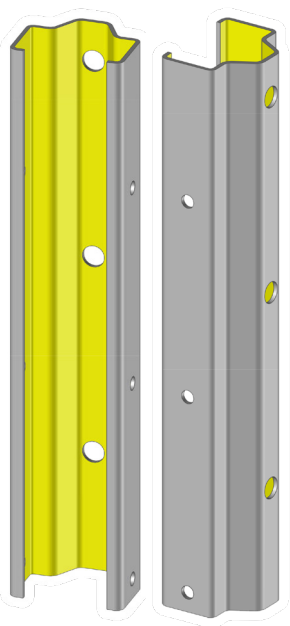



#### Features :

- Robustness suited for low to medium rows lengths
- Equipped with  $\phi$  10.8mm diameter holes at the front for mooring wires fixing accessories
- Equipped with  $\phi$  7mm diameter holes on the sides for fruit and lifting wires

#### Benefits : P2 and P2B

- Profile & shape studied to optimize resistance to tension force
- Space-saving for better machine harvesting at the end of the rows

#### P2B

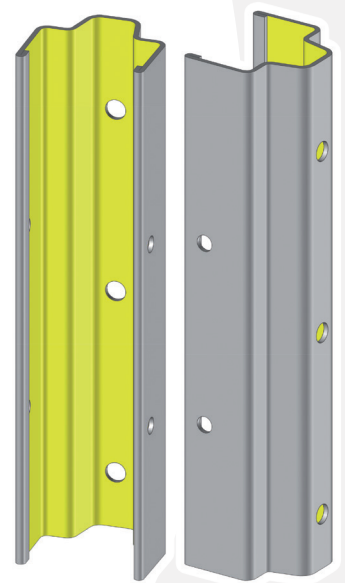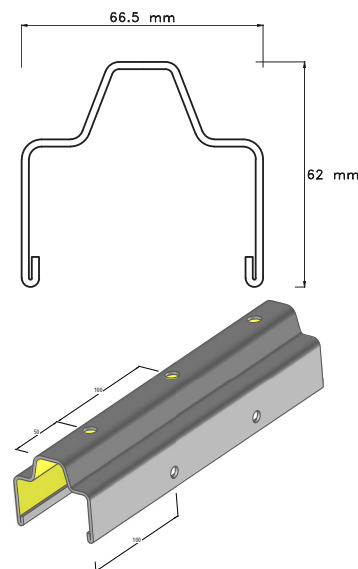

#### Features :

- High robustness adapted to row lengths
- Fitted with  $\phi$  10.8mm diameter holes at the front for mooring wires fixing accessories
- Fitted with  $\phi$  9mm diameter holes on the sides for fruit and lifting wires

### Create your own product

Length	Min. 1.50m to Max. 3m
Material	S250GD or S250GD XCarb™ (low carbon steel)
Coating	Z275 (according to current standards) or ZAM (Zinc, Aluminium, Magnesium)
Thickness	2 mm or 2,5mm
Packaging	bundles of 200 units for P2 and bundles of 100 units for P2B

### Why choose SLPA® posts ?



Customization



Resistance



Weight



Life time



Productivity



Eco-Friendly



100% recyclable





# P2 and P2B

## End Post



### Recommendations for use :

Reminder : Recommended maximum interspacing between 2 line posts : 5m

For high acidity soils, ZAM coating is recommended.

Install the end posts with an appropriate angle of approximately 60°.

The recommended installation depth is 1/3 length of the post to guarantee optimal support.

Connect the mooring at 2 points on the end post and space it at least 4/5 length of the post to optimize its resistance.

### Notes

