




## Line Post with notch system



**NEW !**

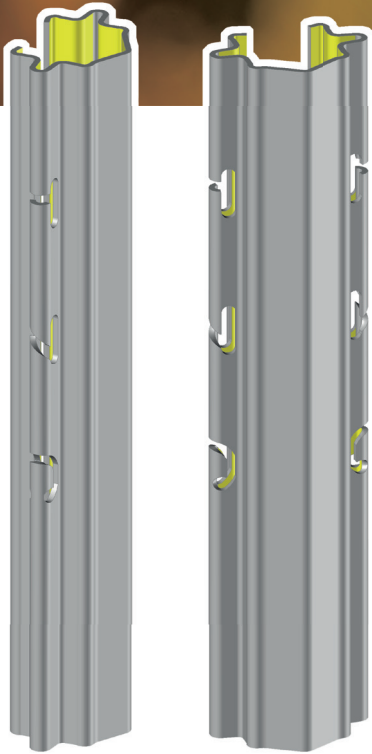

### Product Description :

Line post with customizable notch system :


- **N**-inclined shaped for fruit wires
- Straight new **Ω** shaped for moving wires

Galvanized coating

Additional drilling by request

### Benefits : the most optimised SLPA® post

- Facilitates the installation and adaptation of the height of the trellising wires
- Excellent resistance and grip (17 folds)
- New omega-shaped "Ω" notch makes hooking and unhooking trellising wires easier

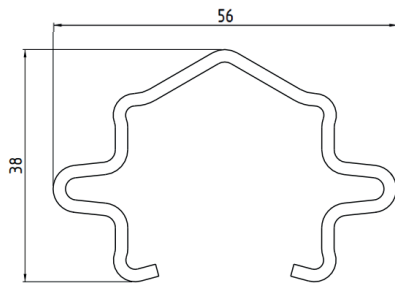

### Productivity

Density




Yield



Planting Height



**NEW «OMEGA Ω»  
NOTCH SHAPE**



### Create your own product

Length	Min 1.20m to Max 2.80m
Material	S250GD or S250GD XCarb™
Coating	Z275 (according to current standards) or ZAM (Zinc, Aluminium, Magnesium)
Thickness	1.5 mm, 1.8mm or 2mm
Notch Types	Inclined « N » or Straight « Ω » shape Customizable spacing by request
Position of fixed wires notches	Face to face and/or offset (for better post resistance)
Packaging	Bundles of 300 units

### Why choose SLPA® posts ?



Customization



Resistance



Weight



Life time



Productivity



Eco-Friendly



100% recyclable






### Accessories



#### Post cap

Adapted to the post.  
It protects the top of the  
post when pressing in.

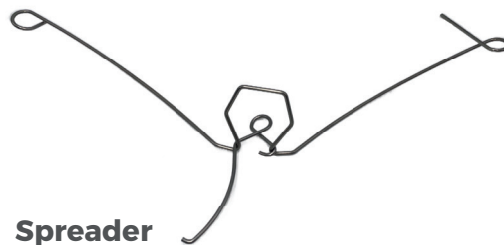

#### Spreader

Adapted to the post.  
The spreader allows you to keep  
the moving wires in a lower  
position when the vines are  
dormant. Save time during lifting.

### Recommendations for use

When installing posts with a post driver, make sure to use the appropriate post cap. In order to guarantee optimal support, the recommended installation depth is 1/3 length of the post.  
For line posts, the profile opening should always be facing the slope.  
Recommended maximum interspacing : 5m.  
For high acidity soils, ZAM coating is recommended.

### Notes

