


PRG 70

VITICULTURE



Line Post with hooks

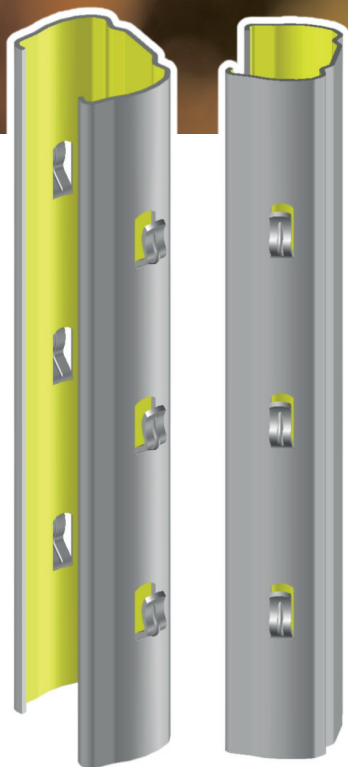

SLPA
INDUSTRIE & AGROFOURNITURES

Product Description

Line post with hook system and customizable spacing
Galvanized coating
Additional drilling available by request

Benefits : PRG 70, the most adaptable

- Customizable pitch between each hooks (70mm minimum)
- Facilitates the installation and adaptation of the height of the trellising wires
- Shape of reinforced hooks studied to limit crushing and simplify opening
- Rigidity and stability adapted to mechanization
- Suitable for all types of soil and vineyard locations

Productivity



Density



Yield



Planting Height

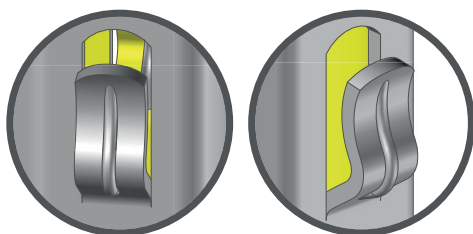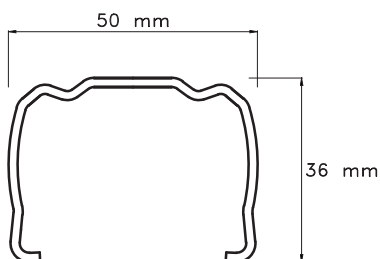

Hooks PG type

Create your own product

| | |
|----------------|--------------------------------------------------------------------------------------------------------------------------|
| Length | Min. 1.20m to Max. 2.80m |
| Material | S250GD or S250GD XCarb™ (low carbon steel) |
| Coating | Z275 (according to current standards) or ZAM (Zinc, Aluminium, Magnesium) <i>Hot-dip galvanizing (soaked) by request</i> |
| Thickness | 1.5mm or 1.8mm |
| Hooks Types | PG type of 8,5 X 19mm with support Customizable spacing by request (minimum spacing of 70mm) |
| Hooks Position | Face to face |
| Packaging | Bundles of 300 units |
| Marking | By request |

Why choose SLPA® posts ?



Customization



Resistance



Weight



Life time



Productivity



Eco-Friendly



100% recyclable



FABRICATION
FRANÇAISE

PRG70

Line post
with hooks

VITICULTURE




Accessories



Masse

Adapted to the post, it preserves the head of the post when driven in.

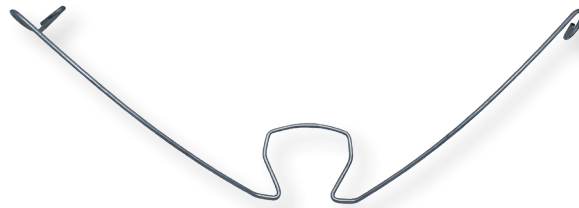

Spreader

Adapted to the post. The spreader allows you to keep the moving wires in a lower position when the vines are dormant. Save time during lifting.



Marquage

Possibility of customizing posts by stamping 8 characters max.

Recommendations for use

When installing posts with a post driver, make sure to use appropriate post cap.

In order to guarantee optimal support, the recommended installation depth is 1/3 length of the post.

For securing fixed wires, knock the hooks down with a hammer.

Recommended maximum interspacing : 5m.

For high acidity soils, ZAM coating is recommended.

Notes

