




PE 27

Line Post
with hooks


VITICULTURE



SLPA
INDUSTRIE & AGROFOURNITURES

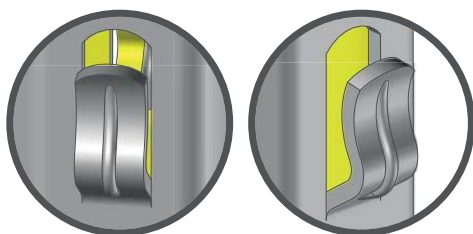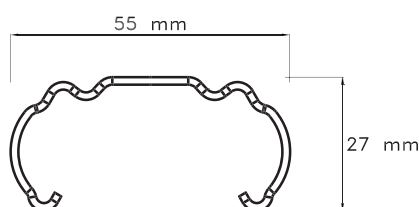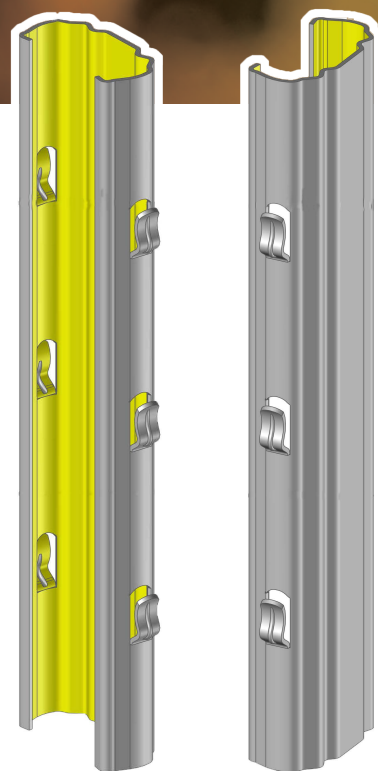

Hooks PG Type

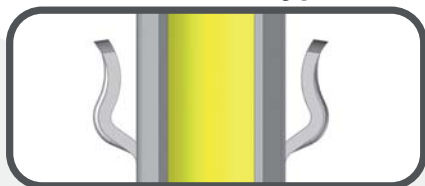

Product Description

Line post with hook system and customizable spacing (70mm minimum)
Reinforced hooks for greater resistance
Galvanized coating
Additional drilling available by request

Benefits : PE 27, the most basic

- Facilitates the installation and adaptation of the height of the trellising wires
- Shape of reinforced hooks studied to limit crushing
- Suitable for all types of soil and vineyard locations
- Recommended for post replacement in existing vineyards

Productivity

Density



Yield



Planting Height



Create your own product

Length	Min 1.40m to Max 2.30m
Material	S250GD or S250GD XCarb™
Coating	Z275 (according to current standards) or ZAM (Zinc, Aluminium, Magnesium)
Thickness	1.5mm only
Hooks types	PG type of 8.5 X 19mm with support Customizable spacing by request (minimum spacing of 70mm)
Hooks position	Face to face
Packaging	Bundles of 300 units
Marking	By request

Why choose SLPA® posts ?



Customization



Resistance



Weight



Life time



Productivity



Eco-Friendly



100% recyclable



PE 27

Line Post
with hooks

GAMME VIGNE



Accessories



Spreader

Adapted to the post.

The spreader allows you to keep the moving wires in a lower position when the vines are dormant. Save time during lifting.



Post cap

Adapted to the post.

It protects the top of the post when pressing in.

Recommendations for use

When installing posts with a post driver, make sure to use appropriate post cap.

In order to guarantee optimal support, the recommended installation depth is 1/3 length of the post.

For securing fixed wires, knock the hooks down with a hammer.

Recommended maximum interspacing : 5m.

For high acidity soils, ZAM coating is recommended.

Notes

