

PCE 28

Line Post




with hooks

VITICULTURE




SLPA

INDUSTRIE & AGROFOURNITURES

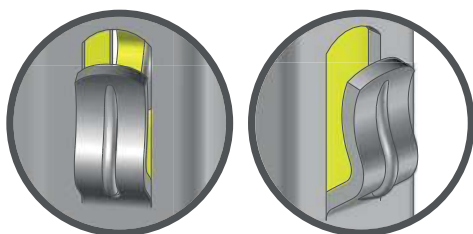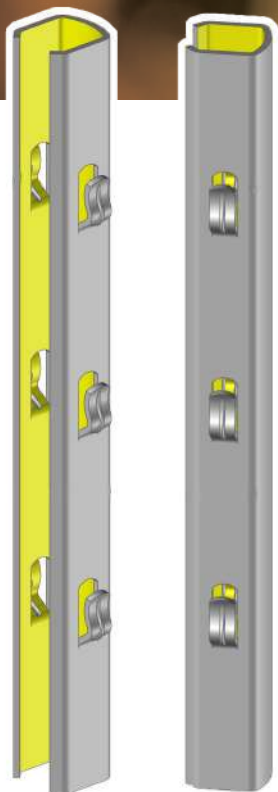

Hooks PG type

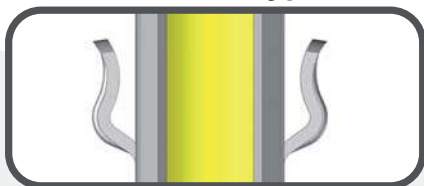

Product Description

Line post with hooks system and customizable spacing (70mm minimum)
Reinforced hooks for greater resistance
Galvanized coating
Additional drilling available by request

Benefits : PCE 28, the most simple

- Facilitates the installation and adaptation of the height of the trellising wires
- Shape of reinforced hooks studied to limit crushing
- Suitable for all types of soil and vineyard locations

Productivity

Density



Yield



Planting Height



Create your own product

Length	Min 140m to Max 2m
Material	S250GD or S250GD XCarb™
Coating	Z275 (according to current standards) ZAM (Zinc, Aluminium, Magnesium) <i>Hot-dip galvanizing (soaked) by request</i>
Thickness	2mm
Hooks Types	PG type de 8.5 X 19 mm with support Customizable spacing by request (minimum spacing of 70 mm)
Hooks Position	Face to face - Notch system SPT by request
Packaging	Bundles of 300 units
Marking	By request

Why choose SLPA® posts ?



Customization



Resistance



Weight



Life time



Productivity



Eco-Friendly



100% recyclable



PCE 28

Line Post
with hooks

VITICULTURE



Accessories



Spreader

Adapted to the post.
The spreader allows you to keep the moving wires in a lower position when the vines are dormant. Save time during lifting.



Post cap

Adapted to the post.
It protects the top of the post when pressing in

Recommendations for use

When installing posts with a post driver, make sure to use appropriate post cap.
In order to guarantee optimal support, the recommended installation depth is 1/3 length of the post.
For securing fixed wires, knock the hooks down with a hammer.
Recommended maximum interspacing : 5m.
For high acidity soils, ZAM coating is recommended.

Notes

