

PR 53




Line Post
with hooks

VITICULTURE



SLPA

INDUSTRIE & AGROFOURNITURES

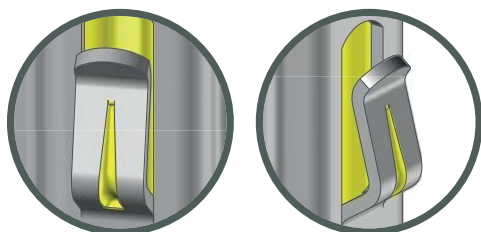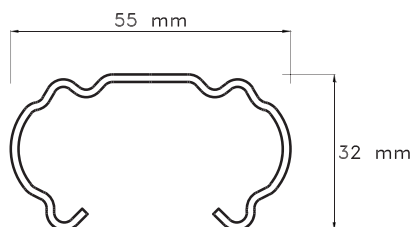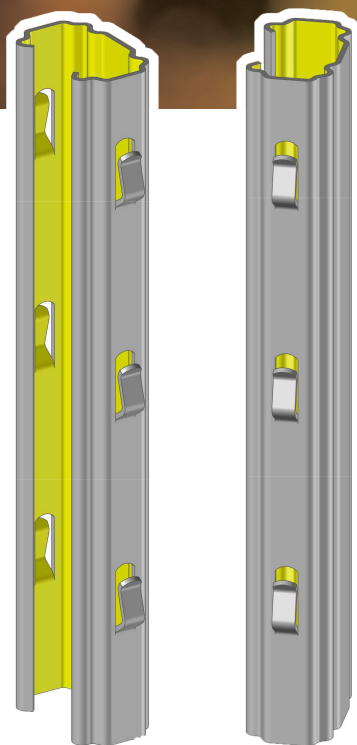

Hooks PR type

Product Description

Line post with hooks system and customizable spacing
Galvanized coating
Additional drilling available by request

Benefits : PR 53, the most complete

- Shape of reinforced hooks studied to limit crushing
- Facilitates the installation and adaptation of the height of the trellising wires
- Rigidity and stability adapted to mechanization
- Designed for difficult terrain

Productivity

Density



Yield



Planting Height



Create your own product

Length	Min 1.40m to Max 2.80m
Material	S250GD or S250GD XCarb™
Coating	Z275 (according to current standards) or ZAM (Zinc, Aluminium, Magnesium)
Thickness	1.5mm or 1.8mm
Hooks Types	PR type of 8.5 X 23mm with support Customizable spacing by request (minimum spacing of 70mm)
Hooks Position	Face to face
Packaging	Bundles of 300 units
Marking	By request

Why choose SLPA® posts ?



Customization



Resistance



Weight



Life time



Productivity



Eco-Friendly



100% recyclable



PR 53

Line Post
with hooks

VITICULTURE



Accessories



Spreader

Adapted to the post.
The spreader allows you to keep the moving wires in a lower position when the vines are dormant. Save time during lifting.



Post cap

Adapted to the post, It protects the top of the post when pressing in.

Recommendations for use

When installing posts with a post driver, make sure to use the appropriate post cap.
In order to guarantee optimal support, the recommended installation depth is 1/3 length of the post. For securing fixed wires, knock the hooks down with a hammer.
Recommended maximum interspacing : 5m.
For high acidity soils, ZAM coating is recommended.

Notes

